



WEAKENED PLANE JOINTS AT 10' O.C. MAX. (TYP.)

1/4" EXPANSION JOINTS AT 60' MAXIMUM O.C. AND AT LIMITS OF CURB RETURNS, STRUCTURES AND DRIVEWAY APPROACHES (TYP.)

'D' PER PLANS SEE NOTE 1

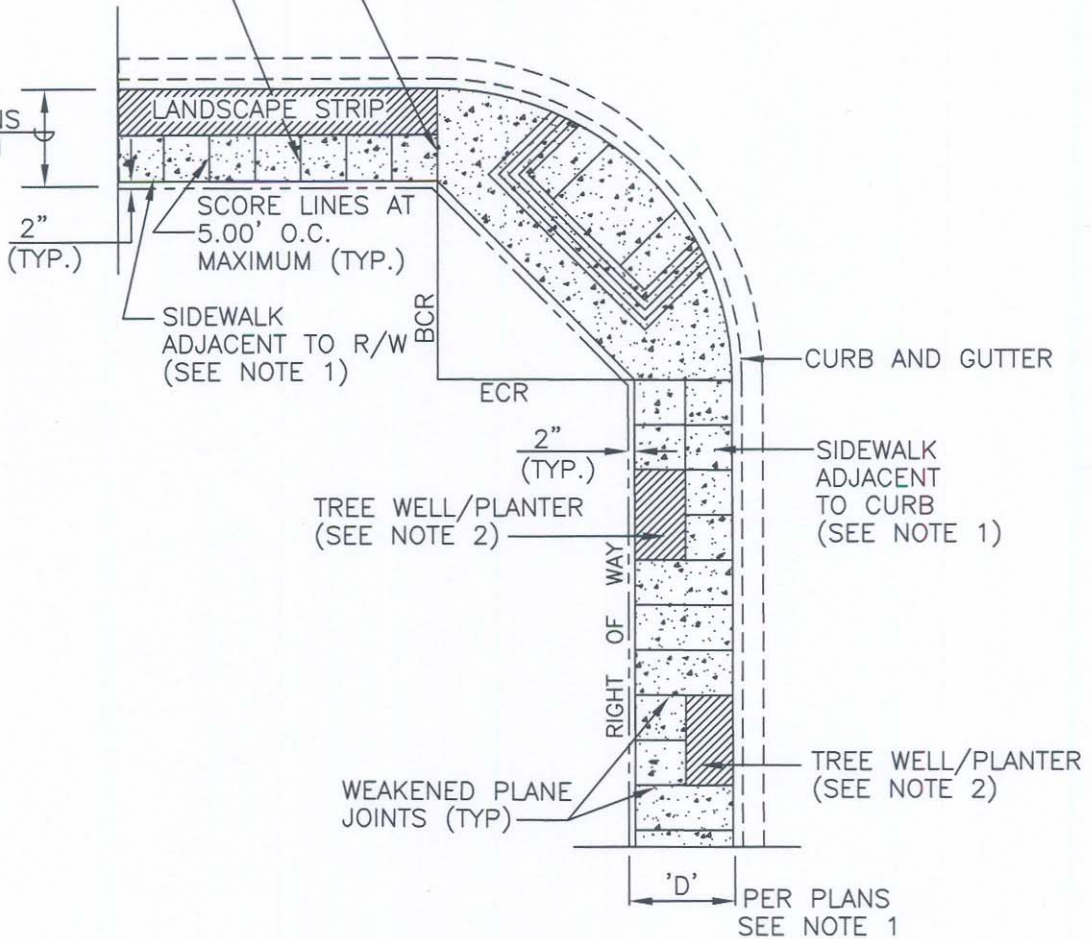

PLAN
N.T.S.

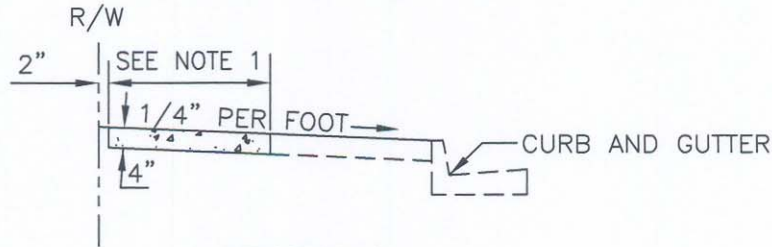

SECTION
N.T.S.

REC'D *Satalio* *1-9-07*
CITY ENGINEER DATE

APP. *[Signature]* *1-10-07*
DIR. OF PUBLIC WORKS DATE


B	01/09/07
A	06/30/06
	REVISED
	ADOPTED 12/30/03

CITY OF ANAHEIM DEPARTMENT OF PUBLIC WORKS

SIDEWALK

USE WITH STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION

STANDARD DETAIL NO.
110-B
SHEET 1 OF 3

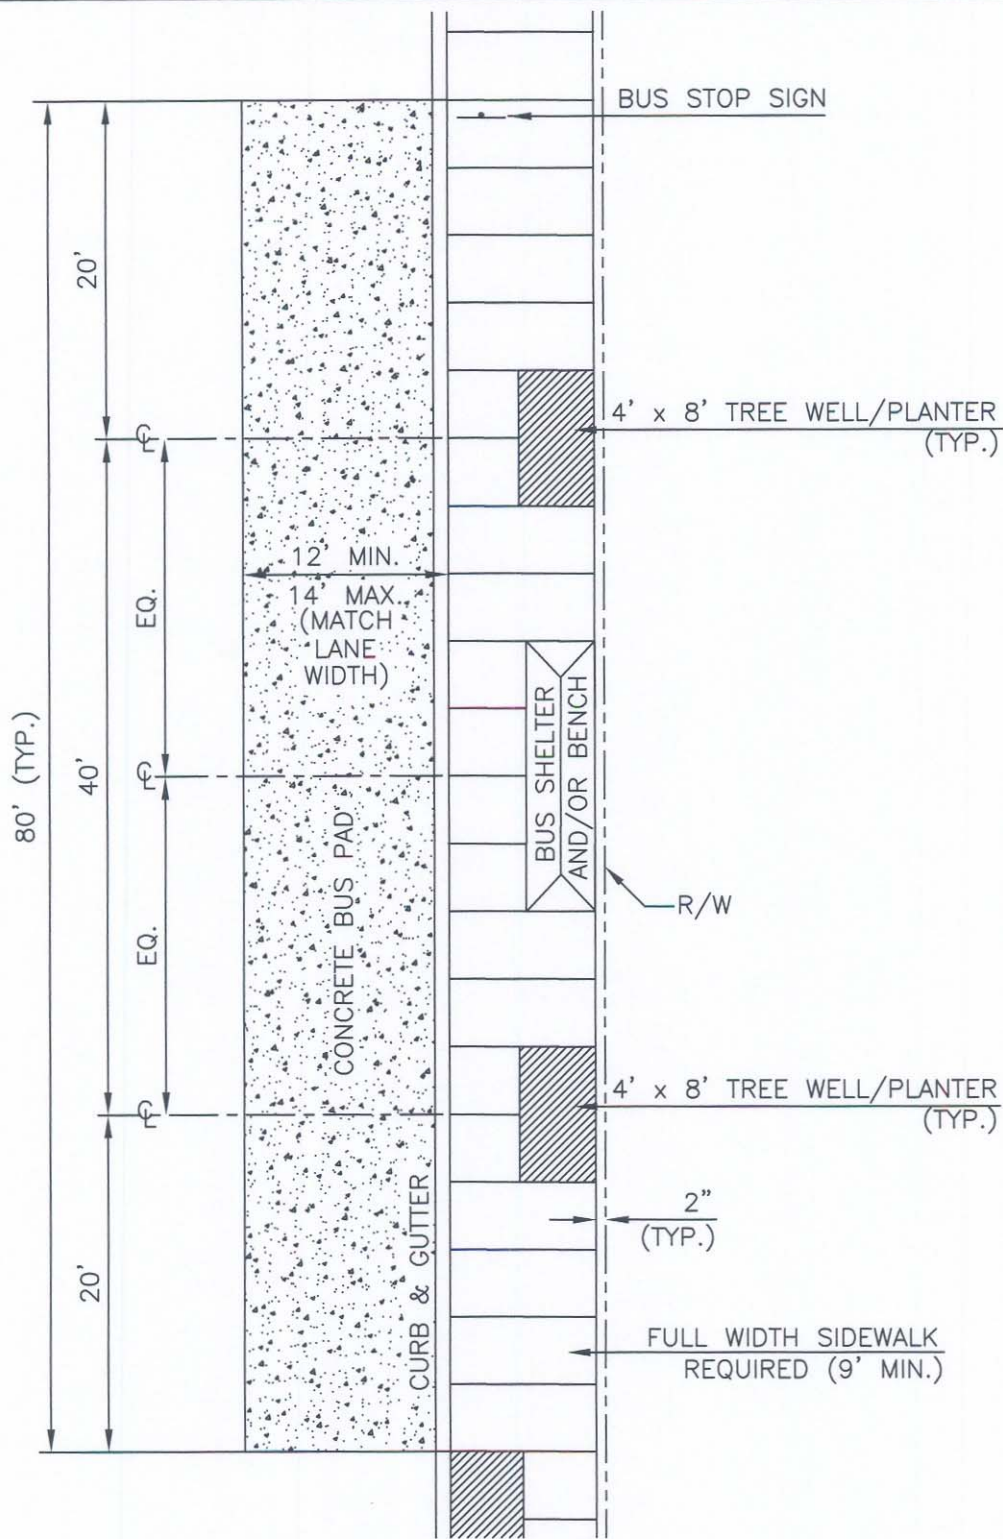

SIDEWALK LAYOUT AT BUS STOP
N.T.S.

REC'D *Satchi Vafah* 1-9-07
CITY ENGINEER DATE

APP. *[Signature]* 1-10-07
DIR. OF PUBLIC WORKS DATE

B	01/09/07
A	06/30/06
	REVISED
	ADOPTED 12/30/03

CITY OF ANAHEIM DEPARTMENT OF PUBLIC WORKS

SIDEWALK

USE WITH STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION

STANDARD DETAIL NO.
110-B
SHEET 2 OF 3

NOTES:

1. SIDEWALK WIDTH:

- A) $D < 8'$: FULL SIDEWALK WITHOUT TREE WELL/PLANTER
- B) $8' \leq D < 9'$: FULL SIDEWALK WITH TREE WELL/PLANTER (SEE NOTE 2).
- C) $9' \leq D < 10'$: FULL SIDEWALK WITH TREE WELL/PLANTER (SEE NOTE 2).
- D) $D \geq 10'$:
 LOCAL STREETS (INCLUDING COMMUTER ARTERIALS): 4' SIDEWALK AND LANDSCAPE STRIP.
 ARTERIAL STREETS: 5' SIDEWALK AND LANDSCAPE STRIP.

2. TREE WELL/PLANTER LOCATIONS:

- A) GENERALLY ADJACENT TO R/W, AT BACK OF SIDEWALK
- B) MAY BE ALLOWED ADJACENT TO CURB, FRONT OF SIDEWALK, WITH CITY ENGINEER'S APPROVAL FOR PALM TREES ONLY
- C) SPACING AT 40' MAX., CENTER TO CENTER.

TREE WELL/PLANTER SIZES:

- A) 3' X 8' - USED WHERE SIDEWALK WIDTH $8' \leq D < 9'$
- B) 4' X 8' - USED WHERE SIDEWALK WIDTH $9' \leq D < 10'$

- 3. FOR SIDEWALK ACCESS RAMPS, SEE STD. PLAN NO. 111(LATEST EDITION).
- 4. AT CURB RETURNS, SIDEWALK SURFACE SHALL HAVE A RADIAL LIGHT BROOM FINISH.
- 5. IF BOTH ENDS OF NEW CONSTRUCTION ABUT EXISTING SIDEWALK, THE NEW CONSTRUCTION SHALL BE SCORED TO MATCH EXISTING.
- 6. ADDITIONAL WEAKENED PLANE JOINTS SHALL BE CONSTRUCTED AT MANHOLES, PULL BOXES, ETC.
- 7. WHEN CONSTRUCTING A NEW TREE WELL/PLANTER IN EXISTING SIDEWALK, REMOVE ENTIRE WIDTH OF SIDEWALK FOR THE LENGTH OF THE TREE WELL/PLANTER AND CONSTRUCT NEW 4" P.C.C. ADJACENT TO TREE WELL/PLANTER.
- 8. IF EXISTING EXPANSION JOINT (EJ) OR TOOLED JOINT (TJ) IS WITHIN 30" OF EITHER SIDE OF THE PROPOSED TREE WELL, REMOVE THE ENTIRE SIDEWALK PANEL TO THE EJ OR TJ AND REPLACE WITH NEW PCC.

REC'D	<i>Satchi Vedula</i> CITY ENGINEER	1-9-07 DATE	APP.	<i>James J. ...</i> DIR. OF PUBLIC WORKS	1.10.07 DATE
				B	01/09/07
				A	06/30/06
				REVISED	ADOPTED 12/30/03
CITY OF ANAHEIM DEPARTMENT OF PUBLIC WORKS					
SIDEWALK					STANDARD DETAIL NO.
USE WITH STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION					110-B
					SHEET 3 OF 3