


NOTES.

1. CONCRETE SHALL BE CLASS 500-C-2500.
2. REINFORCING SHALL BE 6'x6'-W1.4xW1.4 WELDED WIRE MESH (W.W.M.) OR APPROVED EQUAL.
3. ANCHORS SHALL BE CONSTRUCTED IN ACCORDANCE WITH THIS STANDARD WHEN SLOPE EQUALS OR EXCEEDS 2:1.
4. CONCRETE OR AIR-BLOWN MORTAR SHALL BE COLORED MEDIUM OR DARK EARTH TONES (BLACK, TAN, SIENNA, AMBER, OCHRE, GREEN).
5. AIR BLOWN MORTAR SHALL BE CLASS 600-E-3250.
6. GROUND SHALL BE PRE-WETTERED TO THE SATISFACTION OF THE CITY FIELD ENGINEER PRIOR TO PLACEMENT OF CONCRETE. MOISTURE LOSS RETARDANT SHALL BE USED WHEN REQUIRED BY THE CITY FIELD ENGINEER.

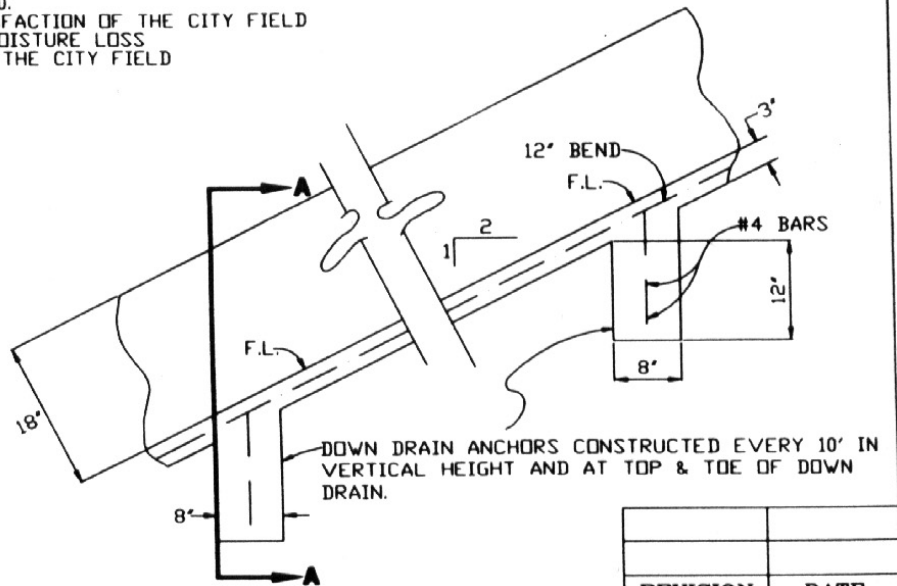

REVISION	DATE

CITY OF ANAHEIM
PUBLIC WORKS
ENGINEERING DEPARTMENT

DOWN DRAIN

APP *Gay E. Johnson* 6-26-91
P.W./CITY ENGINEER DATE

APP *Arthur L. Daw* 6-24-91
DEPUTY CITY ENGINEER DATE

STANDARD
DETAIL NO. **330**